

(1) **CERTIFICATE**

- (2) No. of the Certificate: **ZP/B105/15-PZ**
- (3) Product: **Anchor device type A
Type: LUX-top® EASY**
- (4) Manufacturer: **ST Quadrat S.A.
11, rue Flaxweiler
6776 Grevenmacher / Potaschberg
Luxemburg**
- (5) Production facility: **ST Quadrat Fall Protection S.A.
45, rue Fuert
5410 Beyren
Luxemburg**
- (6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.
- (7) The Certification Body of DEKRA EXAM GmbH certifies that this product comply with the requirements of the test regulations listed under item 8 below. The test results are recorded in test report PB 15-159.
- (8) The requirements are assured by compliance with
DIN EN 795:2012
- (9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.
- (10) The manufacturer is authorised to apply the mark of conformity to the products that conform to the types examined.
- (11) This certificate is valid until 2020-10-14.

DEKRA EXAM GmbH
Bochum, 2015-10-15

Signed: Wiegand

Certification Body

Signed: Mühlenbruch

Special services unit



We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.



Certification body



Special services unit

TRANSLATION

(12) Appendix to

(13) **Certificate**
ZP/B105/15-PZ

(14) 14.1 Subject and type
Anchor device type A
Type: LUX-top® EASY

14.2 Description

The anchor device of type LUX-top® EASY is used to secure one person against falls from a height and is intended for assembly on steel (fig. 1) or concrete (fig. 2). A hexagonal screw (M12) or a concrete anchor is used as a fastening element.

The anchor device consists of an edged plate (t = 3 mm) with two drill holes. One drill hole (Ø 13 mm) is used for accommodating the fastening element, and the other drill hole (Ø 24 mm) is used for accommodating the user's PPE that protects him against falls from a height.

The anchor device is intended for load from any direction and is made of corrosion-resistant steel.

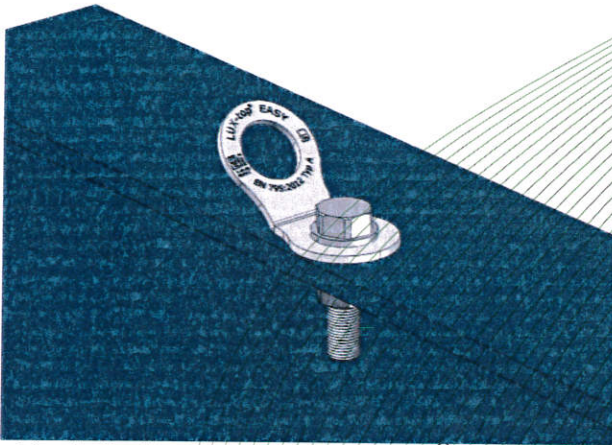


Fig. 1: Anchor device, type: LUX-top® EASY,
mounted onto steel

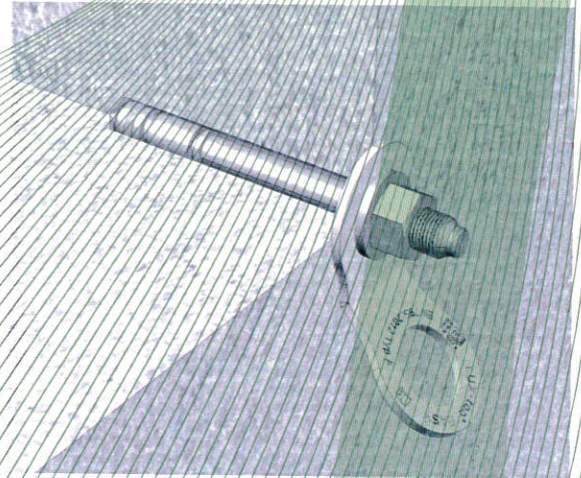


Fig 2: Anchor device, type: LUX-top® EASY,
mounted into concrete

(15) Test Report

PB 15-159, 2015-10-15