

(1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B042/18**

(3) Product: **Anchor device type A**
Type: **LUX-top® SDA-FALZ**

(4) Manufacturer: **ST-Quadrat s.a.**
11, rue Flaxweiler
6776 Grevenmacher/ Potoschberg
LUXEMBOURG

(5) Address: **ST QUADRAT Fall Protection S.A.**
45, rue Fuert
5410 BEYREN
LUXEMBOURG

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this type examination certificate.

(7) The certification body of DEKRA EXAM GmbH certifies that this product comply with the fundamental requirements of the standard listed under item 8 below. The examination and test results in the test and assessment report PB 18-001.

(8) The requirements of the standard are assured by compliance with
DIN EN 795:2012

(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2023-02-20

DEKRA EXAM GmbH
Bochum, 2018-02-21

signed: Wiegand
Certification body

signed: Mühlenbruch
Special services unit

We confirm the correctness of the translation from the German original. In the case of arbitration only the German wording shall be valid and binding.

Wiegand
Certification body

Mühlenbruch
Special services unit



TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**
ZP/B042/18
- (13) 13.1 Subject and Type
Anchor device type A
Type: LUX-top® SDA-FALZ

13.2 Description

The anchor device type LUX-top® SDA-Falz is a single-point anchor device that protects one person from falling.

The device is fixed to the supporting structure of sloping roofs.

The anchor device consists of a corrosion-resistant folded plate ($t = 3 \text{ mm}$) and a 2-part aluminium folded clamping rail.

The device is fixed to double-skin partition roofs (Figure 1) by four bolts (M10 x 33) by means of the aluminium folded clamping rail directly on the standing seam of the roof. The user can protect himself from falling by attaching his personal protection equipment to the angled mounting lug. The anchor device consists of corrosion-resistant material.

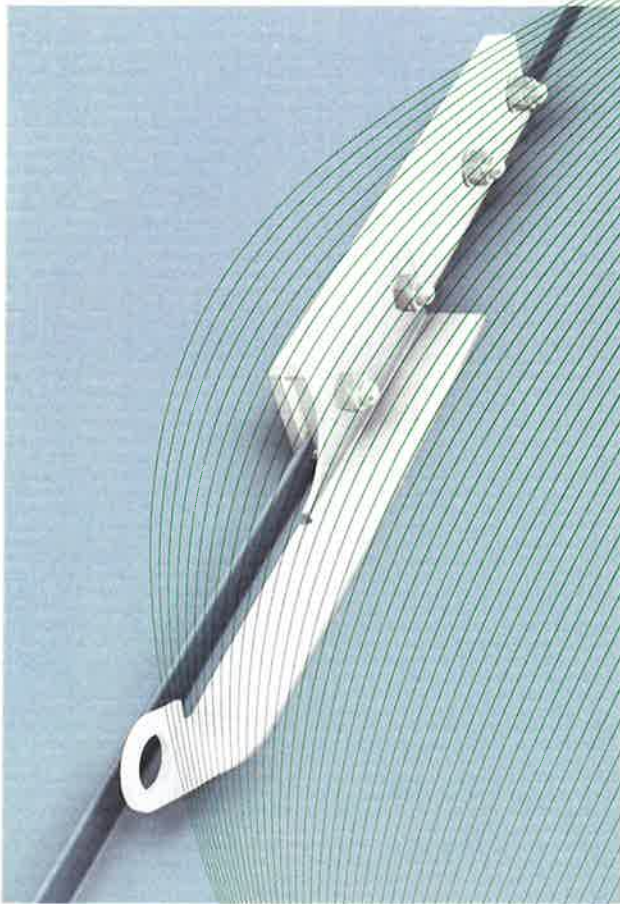


Figure 1: Anchor device type: LUX-top® SDA-Falz

- (14) Test and Assessment Report
PB 18-001, 2018-02-21