

# (1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B139/22**

(3) Product: **Anchor device type A**  
**Type: LUX-top® EASY II**

(4) Manufacturer: **ST Quadrat S.A.**  
**11 rue Flaxweiler**  
**6776 Grevenmacher / Potaschberg**  
**Luxemburg**

(5) Production Plant: **ST Quadrat Fall Protection S.A**  
**45, rue Fuert**  
**5410 Beyren**  
**Luxemburg**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this Type Examination Certificate.

(7) The certification body of DEKRA Testing and Certification GmbH certifies that this product complies with the fundamental requirements of the standard listed under item 8 below. The examination and test results are set out in the report PB 22-147.

(8) The requirements of the standard are assured by compliance with

**DIN EN 795:2012**

(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.


(10) This Type Test Certificate is valid until 2027-08-30.

DEKRA Testing and Certification GmbH  
Bochum, 2022-08-31

signed: Krökel  
\_\_\_\_\_  
Managing director

---

We confirm the correctness of the translation from the German original.  
In the case of arbitration only the German wording shall be valid and binding.

  
\_\_\_\_\_  
Managing director

## TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**  
**ZP/B139/22**
- (13) 13.1 Subject and Type  
Anchor device type A  
Type: LUX-top® EASY II

### 13.2 Description

The anchor device of type LUX-top® EASY II is used to protect one person against falls from a height and is intended for assembly in surfaces of sufficient strength (Fig. 1 – 3).

The angled plate (width = 49.1 mm, height = 45.5 mm) is made of corrosion-resistant steel (t = 4 mm). The drill hole of 16.2 mm size is used to receive the disc and the fastener for the respective assembly surface. The worked-in recess is used to receive the user's personal protective equipment against falls from a height. The anchor device is intended for load from any direction.

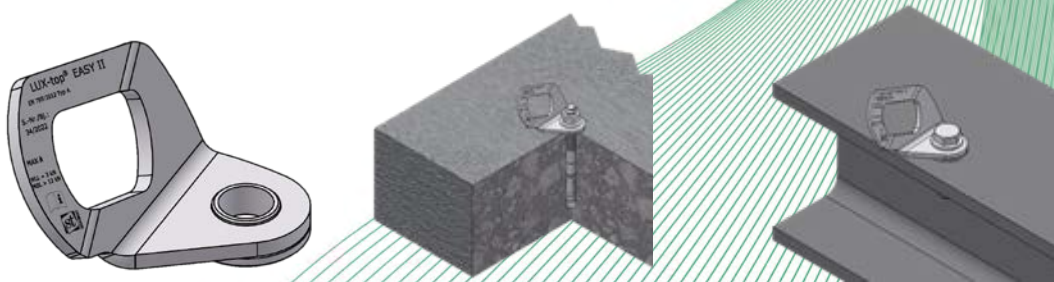


Fig. 1 – 3: LUX-top® EASY II with assembly examples

- (14) Report

PB 22-147, dd. 2022-08-31