

TRANSLATION

- (14) Appendix to
- (15) **EU-Type Examination Certificate**
ZP/B161/22
- (16) 16.1 Subject and type
Anchor device type B
Type: LUX-top® QUICKFIX

16.2 Description

The anchor device of type LUX-top® QUICKFIX is used as a temporary single anchor point to protect a maximum of three people against falls from a height (fig. 1). The device is assembled to steel beams of a thickness between 8 mm and 16 mm and a width of 100 mm to 300 mm. The anchor device consists of two beam clamps which can be moved freely on the threaded rod ($\varnothing 15$ mm). At one end there is an edged sheet ($t = 6$ mm) with a rectangular recess. This recess is used to connect the personal protective equipment against falls from a height. To fix the anchor device to the building structure the device is braced by means of a clamping nut. The anchor device is intended for loads from any direction and is made of corrosion-resistant steel and galvanized cast steel.

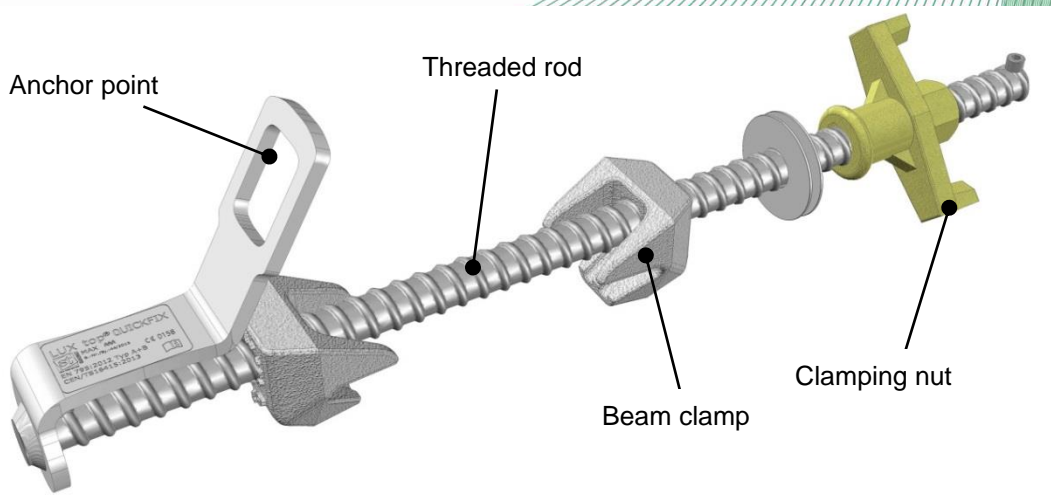


Fig. 1: Anchor device, type: LUX-top® QUICKFIX

- (17) Report
PB 22-128 dd. 2022-10-14